

FIG. 2A

FIG. 2A is a schematic diagram of a system for providing a global rate to a user. The system includes a user device 201, a network 202, and a server 203. The user device 201 is connected to the network 202, which is connected to the server 203. The server 203 is configured to provide a global rate to the user device 201. The global rate is provided to the user device 201 via the network 202. The global rate is provided to the user device 201 via the network 202.

201

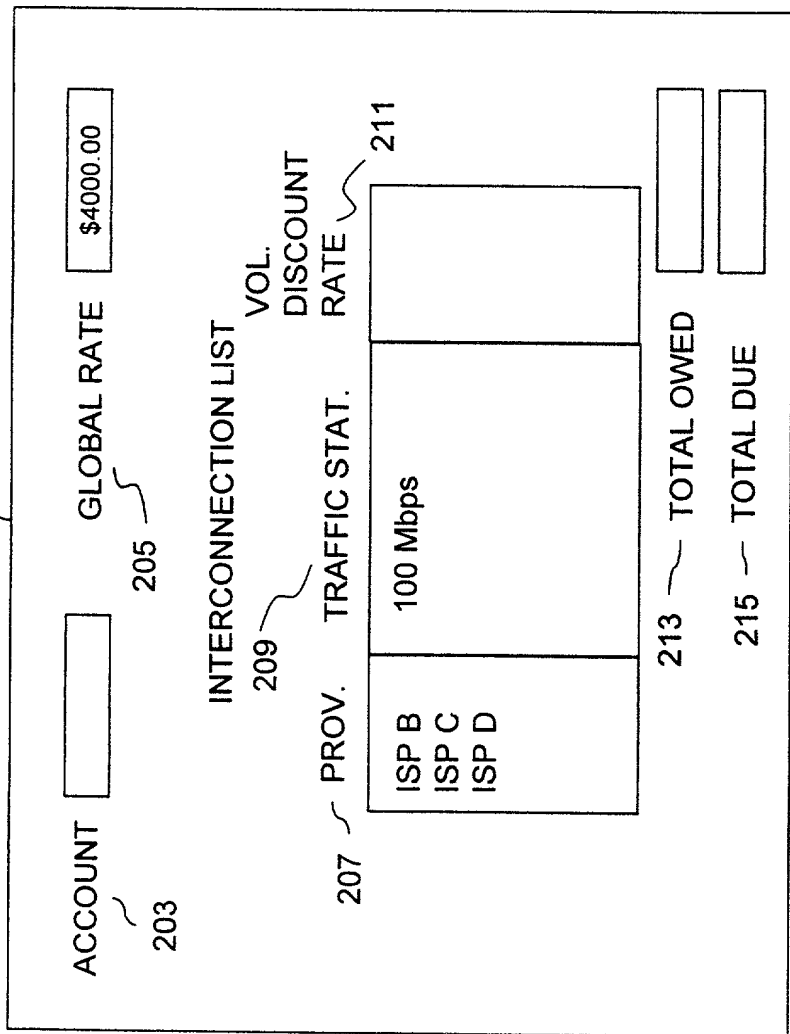


FIG 2B

